

deepBlockAlign v1.0

Alignment parameters:

[Input]

date and time Sun, 03 Feb 2013 02:20:25 +0100
first block group SkinBjRep2_cluster_5762
first file /home/projects/users/sachin/frontier/putative_mirna//tmp4500query.tmp
second block group bg_252
second file /home/projects/users/sachin/frontier/bgs/mirbase.all.map.bgs.flagged.sig

[Block group alignment]

distance weight 1
block weight 1
gap penalty -1


[Block alignment]

gap initialization penalty -2
gap extension penalty -1
threshold for expression difference 1
match score 1
mismatch score -1
profile shape difference penalty 1


[Block group information]

Entropy (first block group) 2.87
Reads (first block group) 10.50
% Unique reads (first block group) 95
Entropy (second block group) 2.28
Reads (second block group) 139.00
% Unique reads (second block group) 100

Block group alignment: SkinBjRep2-cluster-5762-n-a(-) with bg-252-osa-MIR5151-MI0018066(-) [Score: 0.70]

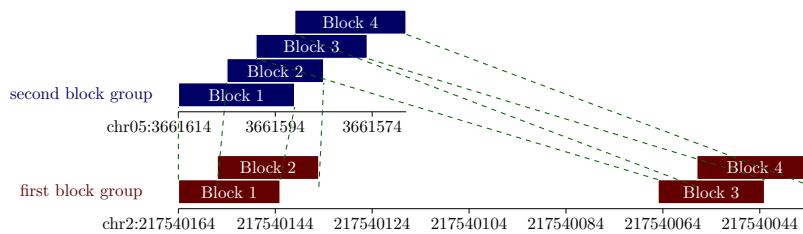

Block alignment:

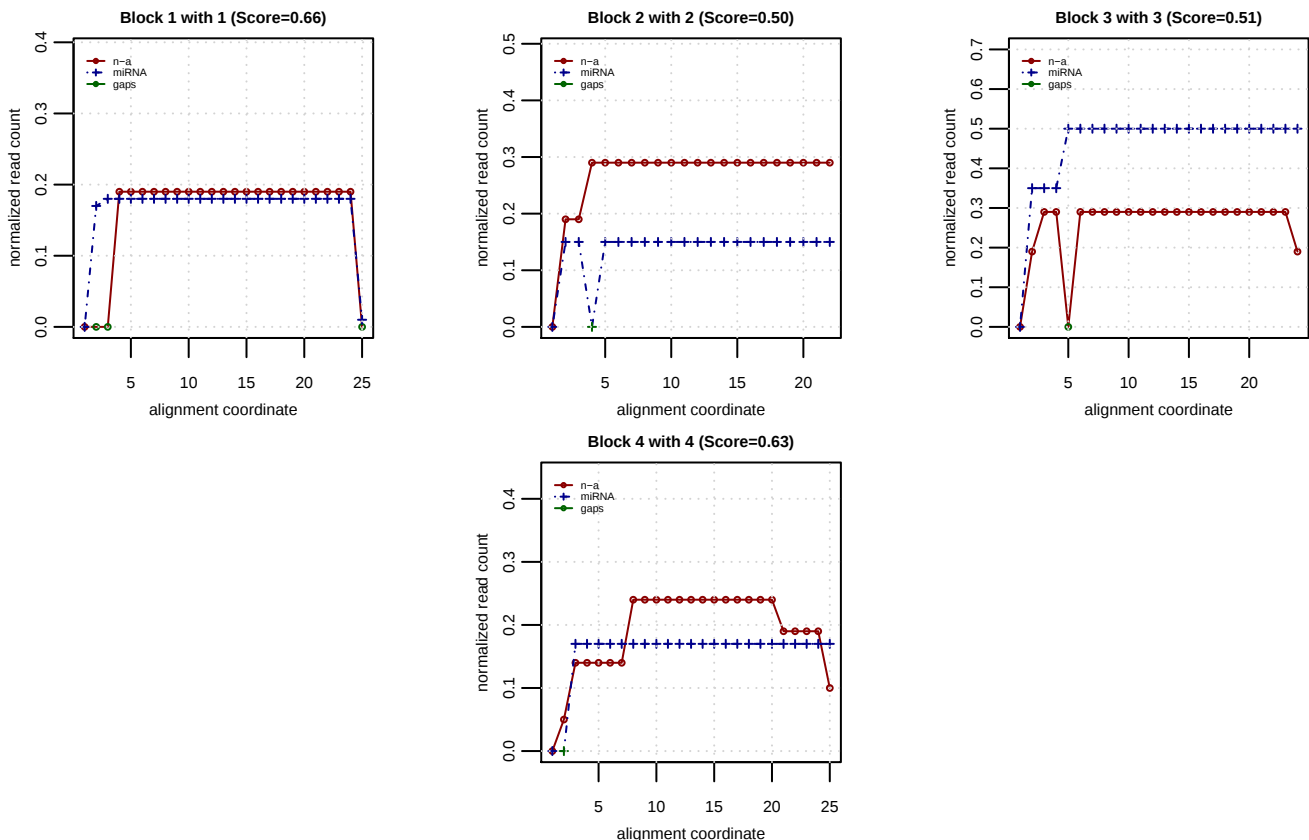

Citation: Langenberger, D^{*}, Pundhir, S^{*}, Ekstrøm, C.T., Stadler, P.F., Hoffmann, S., and Gorodkin, J.(2012). deepBlockAlign: A tool for aligning RNA-seq profiles of read block patterns. *Bioinformatics*, **28**(1),17-24. (*equal contribution)